



1224.100 | 1224 - Worksite-maintenance 360° swivel vices



Description:

- Vices in spheroid graphite cast iron, tensile strength 700 N/mm² minimum.
- Wide bearing base of the prism guide/mobile jaw: lack of guide flexion, vice operation preserved even under heavy loads.
- Interchangeable parallel jaws. High wear resistance, hardness 48/53 HRc.
- Removable V-shaped jaws for tightening the pipes. Hardness 40/46 HRc.
- Adjustment system by 2 complex gap compensation screws.
- Burnished control bar.

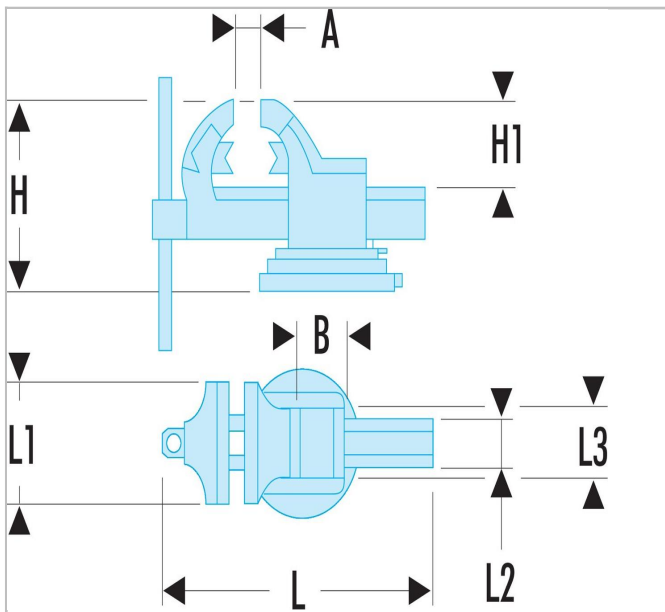

|  1224.100 | |
|---|-------|
| Length L [mm] | 345.0 |
| Length L1 [mm] | 104.0 |
| Length L2 [mm] | 51.0 |
| Length L3 [mm] | 70.0 |
| Head Width B [mm] | 63.0 |
| Height H [mm] | 164.0 |
| Height H1 [mm] | 74.0 |
| A Maxi [mm] | 125.0 |
| Weight [Kg] | 9.7 |