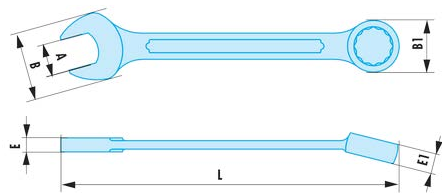


440.35SR 440.SR - Non sparking metric combination wrenches**Description:**

- Special non sparking and anti-magnetic Copper-Beryllium alloy.

| | |
|----------------|----|
| A [mm]: | 35 |
|----------------|----|

| | |
|----------------|------|
| B [mm]: | 72,0 |
|----------------|------|

| | |
|-----------------|------|
| B1 [mm]: | 55,0 |
|-----------------|------|

| | |
|----------------|------|
| E [mm]: | 15,0 |
|----------------|------|

| | |
|-----------------|------|
| E1 [mm]: | 21,0 |
|-----------------|------|

| | |
|----------------|-----|
| L [mm]: | 360 |
|----------------|-----|

| | |
|-------------|-----|
| [g]: | 890 |
|-------------|-----|