

467B - Metric ratchet combination wrenches





Standards:

NF ISO 1711-1, NF ISO 691, ISO 1711-1, ISO 691, DIN ISO 1711-1, DIN ISO 691

Description:

- Ultra-Grip ratchet wrenches: retaining pin on the ring + securing notch on the open end. Does not slip on the nuts, optimum safety.
- Compact ratchet mechanism reversing by lever. Better accessibility.
- 5° increments (7.5° for size 6 mm; 6° for 7, 8 and 9 mm sizes). Enhanced productivity.
- Ring and open end tilted at 15°.
- Metric sizes: 6 to 41 mm
- Satin chrome finish.

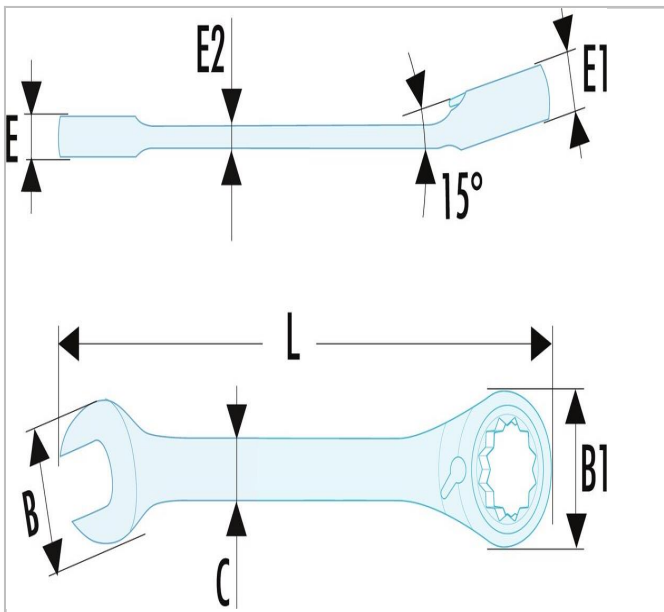

	A [mm]	A [in]	Length L [mm]	Thickness E [mm]	Thickness E1 [mm]	Thickness E2 [mm]	Head Height C [mm]	Head Width B [mm]	Head Width B1 [mm]	Weight [Kg]
467B.10	10.0		158.0	5.1	7.3	3.4	10.4	22.7	20.2	0.049
467B.11	11.0		165.0	5.2	7.7	3.5	10.6	23.7	22.0	0.058
467B.12	12.0		171.0	5.4	8.2	3.8	11.3	26.8	23.2	0.069
467B.13	13.0		178.0	5.7	8.6	4.3	12.2	28.4	25.3	0.086
467B.14	14.0		190.0	5.9	9.0	4.3	13.0	30.8	27.0	0.1
467B.15	15.0		199.0	6.1	9.4	4.7	14.0	32.3	28.3	0.115
467B.16	16.0		208.0	6.6	9.9	5.3	14.1	34.9	30.0	0.138
467B.17	17.0		225.0	6.6	10.3	5.4	15.4	36.8	31.7	0.162
467B.18	18.0		236.0	7.4	10.7	5.8	15.6	38.4	32.8	0.183
467B.19	19.0		247.0	7.4	11.2	6.0	16.0	41.2	33.9	0.212
467B.21	21.0		287.0	8.6	13.0	6.3	18.0	46.9	39.7	0.314
467B.22	22.0		287.0	8.6	13.0	6.3	18.0	46.9	39.7	0.314
467B.24	24.0		320.0	8.9	14.5	6.7	19.5	51.0	46.0	0.414
467B.27	27.0		356.0	9.8	15.5	7.1	21.0	57.9	52.0	0.567
467B.30	30.0		400.0	10.5	17.0	8.3	24.2	64.9	58.0	0.794
467B.32	32.0		422.0	11.0	17.5	8.5	26.0	67.9	62.2	0.951
467B.34	34.0		455.0	11.0	17.5	8.7	27.0	72.0	62.2	1.026
467B.36	36.0		487.0	13.0	18.0	10.5	30.0	79.9	66.0	1.343
467B.38	38.0		487.0	13.0	18.0	10.5	30.0	79.9	66.0	1.343

467B.41	41.0		565.0	14.0	19.5	12.5	31.3	84.7	72.0	1.871
467B.6	6.0		128.0	4.0	6.3	2.7	6.5	14.1	14.1	0.02
467B.7	7.0		140.0	4.6	6.5	3.1	8.2	18.6	16.8	0.034
467B.8	8.0		140.0	4.6	6.5	3.1	8.2	18.6	16.8	0.034
467B.9	9.0		149.0	4.6	6.9	3.2	9.0	21.0	18.6	0.04