

## AT3X75 | AT - PROTWIST® screwdrivers for slotted head screws - milled blades





### Standards:

NF ISO 2380-1, NF ISO 2380-2, ISO 2380-1, ISO 2380-2, DIN ISO 2380-1, DIN ISO 2380-2, ASME B107.600

### Description:

- Round shank for access in holes.
- Extra-long shank up to 300 mm for difficult and remote access.
- Inline Hardening Process – +100% Tip Life and +100% Bar Strength.
- Handle Material - Softer for more Comfort and still Chemical Resistant.
- Blade " tri-coating " treatment (Zinc-Nickel-Chromium) - 4x Corrosion Resistance.
- Handle 'Channel' - +10% Torque.
- Laser Marking - gives virtually Permanent Marking.
- CNC tip machining - gives better Screw Fit increasing Torque Transfer and Reducing Wear.

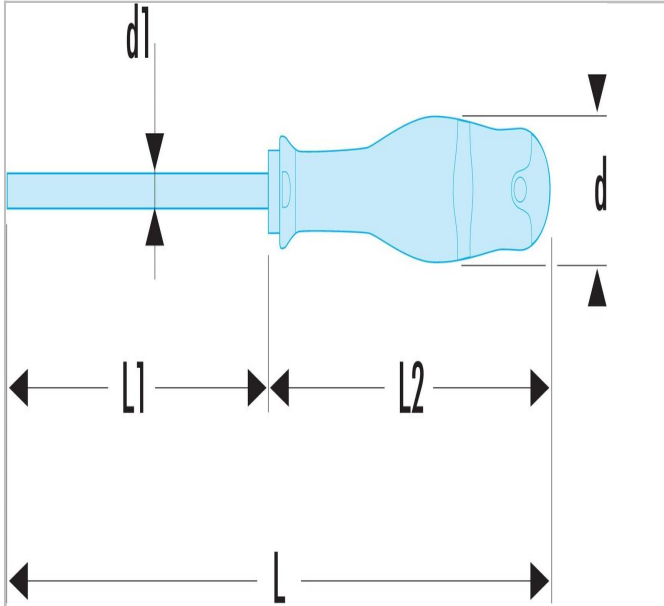

|  | AT3X75 |
|--|--------|
| A [mm]   | 3.0    |
| Diameter [mm]  | 19.0   |
| Diameter D1 [mm]   | 3.0    |
| Length L1 [mm]   | 75.0   |
| Length L [mm]  | 178.0  |
| Length L2 [mm]   | 94.0   |
| Thickness E [mm]   | 0.5    |
| Width [mm]   | 3.0    |
| Weight [g]   | 32.0   |