


NK.2000F2 3/4" composite impact wrench



Description:

- Durable twin hammer mechanism encased in a strong aluminium housing.
- 6 vane motor delivering 1700 N.m of torque.
- One switch integrating regulation and forward reverse.
- Insulating and lightweight durable composite housing.
- Feather teasing trigger for optimal speed regulation.
- Specific short design to get into confined spaces.
- Socket ring retainer for safety.
- Breakaway torque 1950 N.m.
- Breakaway torque 1760 N.m.
- Blows per minute 850 cpm.
- Free speed 6360 tr/min.
- Square drive 3/4".
- Working pressure 6,2 bar.
- Average air consumption 125 l/min.
- Air inlet 3/8".
- Minimum hose diameter 13 mm - 1/2".
- Vibration 10,70 m/s²/a.
- Vibration 1,55 m/s²/K.
- Sound pressure 99,10 dB(A).
- Sound power 110,10 dB(A).

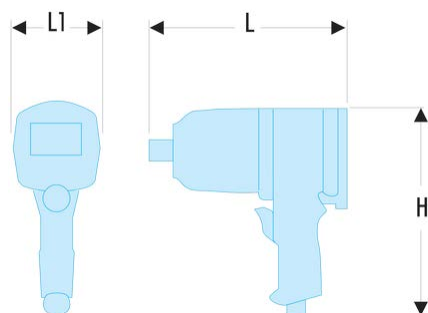

H [mm]: 213

L [mm]: 221

L1 [mm]: 86

[kg]: 3,900