


NS.A1700F2 1/2" angular impact wrench

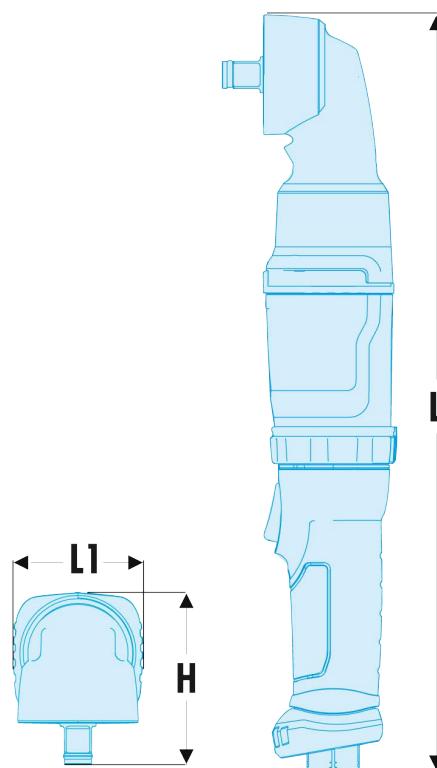

Description:

- Powerful and robust single hammer mechanism delivering a torque of 271 N.m.
 - Comfortable and ergonomic “soft” grip also insulating from the cold.
 - Protection bumpers for long durability.
 - Soft trigger for excellent speed control.
 - Safe and fast socket locking by friction pin.
 - Also available in 3/8": NJ.A1700F2.
 - Separation torque 271 N.m.
 - Work torque 244 N.m.
 - Impacts per minute 1700 cpm.
 - Idle speed 7200 rpm.
 - 1/2" male square drive.
 - Operating pressure 6.2 bar.
 - Average air consumption 143 l/min.
 - Average air consumption 5 cfm
 - 1/4" tool connector.
 - Min hose diameter. 10 mm - 3/8".
 - Vibration 29,96 m/s²/a.
 - Vibration 14.35 m/s²/a.
 - Acoustic pressure 98 dB(A).
- Noise level 109 dB (A).

H [mm]: 80

L [mm]: 353

L1 [mm]: 63

[kg]: 1,8