


## U.53KL0 U.53KL - Non-tapped beams

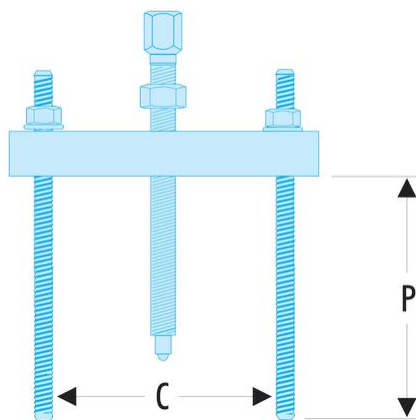

### Description:

- Non tapped beams allow to use clamps U.49P1 to U.49P9 to extract bearings by inside grip.
- U.53KL0: for clamps U.49P1 to U.49P4.
- U.53KL2: for clamps U.49P5 to U.49P9 with adaptor tip U.49BR1.

<b>C [mm]:</b>	25 - 100
<b>C mini - maxi [mm]:</b>	25 - 100
<b>d [mm]:</b>	M8
<b>d1 [mm]:</b>	6
<b>L [mm]:</b>	110
<b>L1 [mm]:</b>	155
<b>L2 [mm]:</b>	20
<b>L3 [mm]:</b>	20
<b>P [mm]:</b>	125
<b>P maxi [mm]:</b>	125
<b>Hex Size [mm]:</b>	6
<b>Tie-rods:</b>	U.53KL0-02
<b>Ton [t]:</b>	1
<b>Screw Size:</b>	U.53KL0-02
<b>T [kN]:</b>	10
<b>[g]:</b>	405
<b>[kg]:</b>	0,400