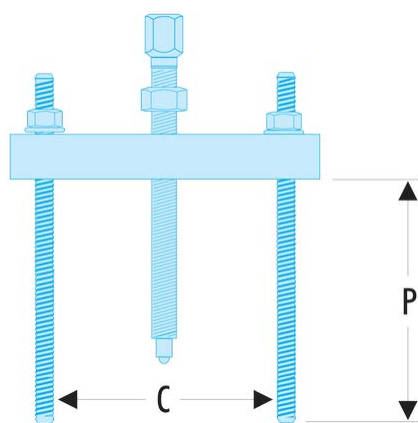


U.53KL2 U.53KL - Non-tapped beams**Description:**

- Non tapped beams allow to use clamps U.49P1 to U.49P9 to extract bearings by inside grip.
- U.53KL0: for clamps U.49P1 to U.49P4.
- U.53KL2: for clamps U.49P5 to U.49P9 with adaptor tip U.49BR1.

C [mm]:	70 - 200
C mini - maxi [mm]:	70 - 200
d [mm]:	M16
d1 [mm]:	11
L [mm]:	220
L1 [mm]:	280
L2 [mm]:	30
L3 [mm]:	30
P [mm]:	240
P maxi [mm]:	240
Hex Size [mm]:	11
Tie-rods:	U.53R2L
Ton [t]:	3
Screw Size:	U.53K2-07
T [kN]:	30
[g]:	840
[kg]:	2,400