


V.260F Jitterbug sander - 95 x 170 mm - 8 holes

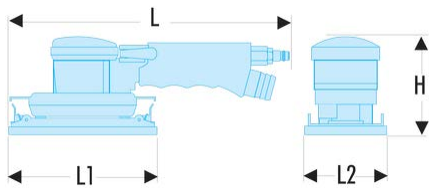

Description:

- One hand forward reverse "butterfly" trigger
- High torque motor delivering 8500 RPM.
- Two hand design great for work on large and / or vertical surfaces.
- 29 mm central vacuum exhaust port to allow easy removal of dust if connected to a central vacuum system.
- Easy to access speed regulator.
- Composite body is lightweight and insulates against cold.
- 5 mm orbit great for general sanding applications.
- Easy to use clips for abrasive attachment.
- Supplied with 8 hole 95 x 170 mm velcro pad.
- Supplied with pad and 8-hole abrasive perforator.
- Free speed 8500 tr/min.
- Orbit size 5 mm - 3/16" ..
- Central vacuum.
- Working pressure 6,2 bar.
- Average air consumption 115 l/min.
- Air inlet 1/4".
- Minimum hose diameter 10 mm - 3/8".
- Vibration 53,80 m/s²/a.
- Vibration 5,82 m/s²/K.
- Sound pressure 95,20 dB(A).
- Sound power 106,20 dB(A).
- 8 hole pad V.260A1.
- 95 x 170 mm pad V.260SAV50B.

H [mm]:	120
---------	-----

L [mm]:	288
---------	-----

L1 [mm]:	170
----------	-----

L2 [mm]:	95
----------	----

[kg]:	2,100
-------	-------