


1/2" DRIVE HINGED HANDLE | S.141A

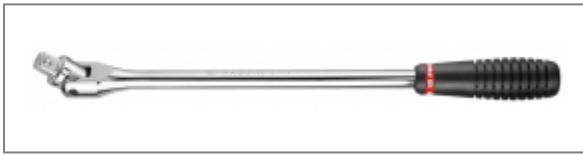


Norm :

NF ISO 3315, ISO 3315, DIN 3122, ASME B107.10

Description

- 180° hinged and secured head to maintain the position even with a socket engaged.
- Bi-material elastomer grip: high resistance to abrasion and the most severe workshop solvents: SP95, SP98, diesel fuel, acetone, brake fluid, Skydrol, Jet Oil, kerosene.

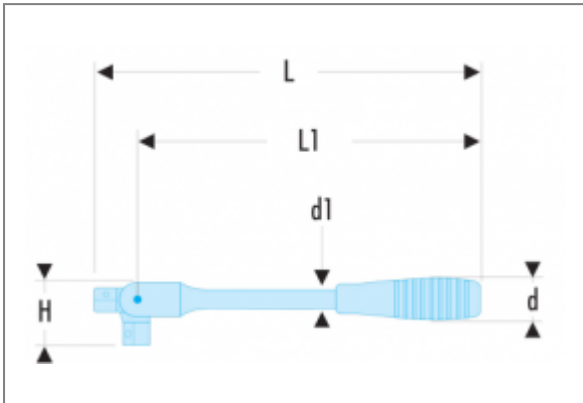

Information

d [mm]	31
d1 [mm]	14
H [mm]	41
L [mm]	381
L1 [mm]	349,5
Qtys	23
[g]	595